

Modular series

## Controller S-KB-4

For continuous delivery



- Pump controller for continuous delivery
- Good value 2-Q-DC servo amplifier
- For brushless DC-motor with digital hall sensors
- Compact aluminum housing
- Speed set with external voltage signal
- Current delimiter
- Screw terminal for plug-in of mzr-pump

The controller S-KB-4 is recommended for continuous flow control in combination with micro annular gear pump mzr-7241.

The 2-Q-DC servo amplifier enables to control the constancy of flow rate via motor speed using the hall sensors of the brushless

DC-motor. Speed can be adjusted with an external voltage signal (0 ... 10 V).

### Technical Data

Control	PI regulator for motor speed
Supply voltage $U_B$	24 V DC (5 – 28 V)
Max. continuous output current	4 A
Max. peak output current	6 A
Speed	500 – 6000 rpm
Voltage connector	screw terminal
Pump connector	screw terminal
Input for motor speed »U_in«	voltage signal 0 ... 10 V external potentiometer 10 k $\Omega$
Direction input »DIR«	Right direction: low (0 ... 1 V) Left direction: high (4 V ... $U_B$ )
Error output »FG«	Open collector max. $U_B$ / 15 mA No Error: high level
Operating temperature range	0 ... +60 °C
Protective class	IP 20
Measurements (L x B x H)	approx. 65 x 58 x 22 mm
Weight	approx. 160 g

Subject to technical changes.


### Contact

HNP Mikrosysteme GmbH  
Juri-Gagarin-Ring 4 · D-19370 Parchim

phone +49| 3871| 451-301  
fax +49| 3871| 451-333


e-mail [info@hnp-mikrosysteme.de](mailto:info@hnp-mikrosysteme.de)  
<http://www.hnp-mikrosysteme.de>

## Measurements

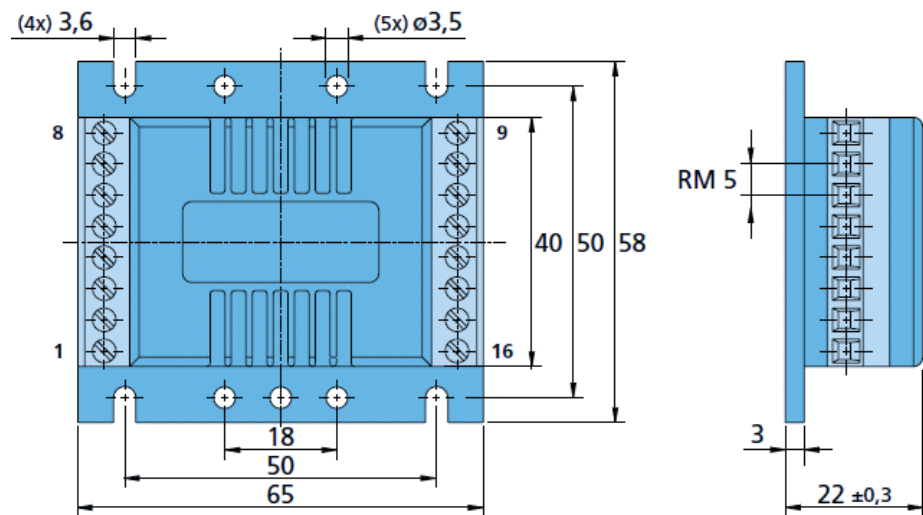

Subject to technical changes.

## Connection diagram

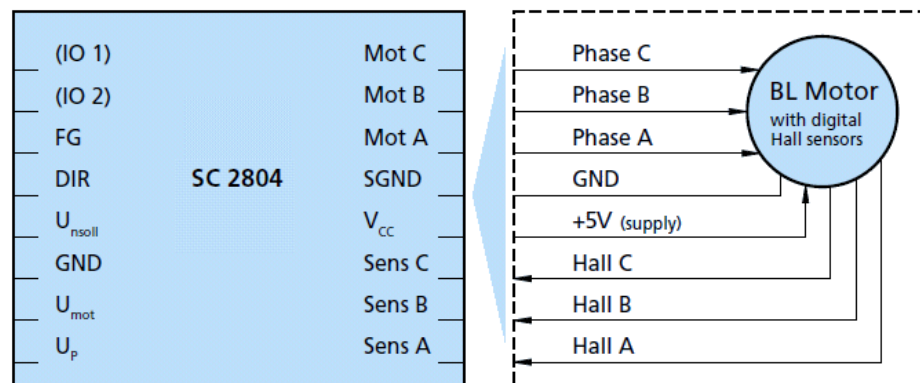

## Item number

66 04 01 26

Controller S-KB-4 for micro annular gear pump mzi-7241

66 04 01 27

Programming adapter to configure the controller S-KB-4