


Product information

S-BL · Controller

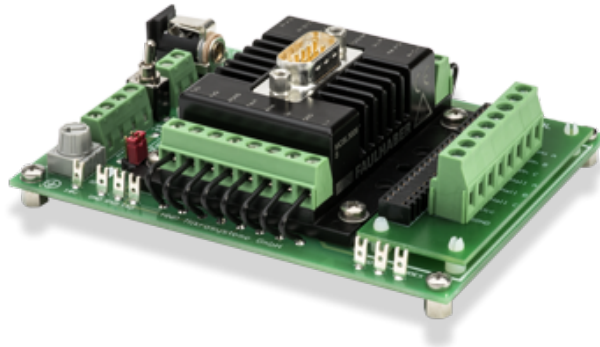

Description

The controller S-BL is recommended for high requirements in control of discrete and continuous delivery tasks in combination with a mzs-pump with special brushless motor. The 16-bit microcontroller allows speed and position control for highly accurate dosage. The compact design on a PCB offers flexible installation. Process control link can be established via a RS-232 interface. Motor speed or flow rate can be set either by an analog input (0-10 V) or a potentiometer mounted on the PCB. Programs for dosage can be saved in the memory.

Advantages

- High quality pump controller for continuous delivery and discrete dosage
- For mzs-pumps with special brushless motor
- Programming of controller with Windows® software »Motion Manager«
- Potentiometer for speed set
- Analog input 0-10 V
- 1 digital input, input is equipped with a switch
- 1 digital output, optionally programmable as input
- Two colored LED status indicator
- EEPROM memory
- RS-232 interface

Technical data

| | |
|--------------------------|---|
| Controller | PI-controller, speed and position control |
| Supply voltage | 24 V DC (12 – 30 V) |
| Velocity range | 1 - 6.000 rpm |
| Voltage | DIN 45323 socket, screw terminal |
| Pump connector | DIN 45323 socket, screw terminal |
| Serial interface | RS-232, SUB-D plug, 9-pole |
| Input # 1 (speed) | 0 - 10 V |
| Error output (input # 2) | Open collector max. UB / 30 mA; no error: connected to GND; as input: low 0...0.5 V / high 4 V...UB |
| Digital inputs # 3 | low 0...0.5 V / high 4...30 V; input # 3 with switch |
| Program memory | 6,600bytes |
| Protection class | IP 20 |
| Dimensions (L x W x H) | approx. 112 x 85 x 36 mm |
| Weight | approx. 170 g |
| Remarks | Subject to technical changes. |

Notice

Even if single parameters are within the indicated performance range of technical data, certain parameter combinations may not be achievable. Single parameters may exceed their indicated performance range under adequate circumstances. For detailed evaluation please contact HNP Mikrosysteme. Actual performance may vary. Specifications are subject to change without notice.

Patents and trademarks

Micro annular gear pumps (and housings) are protected by assigned patents: EP 1 354 135 B1; US 7,698,818 B2; DE 10 2011 001 041 B4; CN 103 348 141 B; US 10,012,220 B2; CN 103 732 921 B; US 9,404,492 B2; US 6,520,757 B1.

HNPM[®], mZr[®], MoDoS[®], µ-Clamp[®], µDispense[®], Centrifluidic Technologies[®] are registered German trademarks of HNP Mikrosysteme GmbH.

Contact

HNP Mikrosysteme GmbH
 Bleicherufer 25
 19053 Schwerin
 Germany

T +49 385 52190-300
 F +49 385 52190-333
 info@hnp-mikrosysteme.de

Last update 2019/07