

## Product information

mzr-2942X1-cp · Modular pump series



### Description

The micro annular gear pump mzr-2942X1-cp of the modular pump series is designed as a metal-free pump. To guarantee maximum chemical resistance, the rotors and all wetted components are made of state-of-the-art materials, such as the high-performance plastic PEEK or various ceramics. All wetted components, including the sealing components, are FDA-compliant. The pump generates a low pulsation, highly precise flow featuring low shear stress. It dispenses at a high precision the lowest volumes in microliter range. The compact design with a brushless motor as well as an integrated motion controller for speed and position control are further characteristics of this pump variant. The pump is suitable for the life science and laboratory analysis sectors and for all other fields of application where low pressures and low viscosities are used for dosing or continuous flow of liquid media.

### Advantages

- Small dosage volumes, high flow rates smallest volume 0.5 µl – flow up to 18 ml/min
- High dosage precision precision CV 1 % at low volumes
- Integrated motion controller programmable motor control for speed and position control with RS-232 interface
- Metal-free / chemical resistance high-performance plastics and ceramics
- Low pulsation delivery, low shear stress rotary micro annular gear technology

### Applications

- Analytical instrumentation
- Laboratory automation
- Chemical and pharmaceutical industry
- Life-Science
- Food industry

## Technical data

Flow rate	0.3 – 18 ml/min
Smallest dosage volume	0.5 µl
Displacement volume	3 µl
Differential pressure range	0 - 3 bar * (0 - 43.5 psi *)
Maximum inlet pressure	1 bar (15 psi)
Liquid temperature range	-20 ... +60 °C (-4 ... +140 °F)
Viscosity range	0.3 – 100 mPas **
Precision CV	1 % (Coefficient of variation CV)
Velocity range	10 – 6,000 rpm
Fluid connection	manifold assembly M2.1
Wetted parts	PEEK, ceramics shaft seal: FPM (FDA compliant) static seal: FFPM (FDA compliant)
Motor	brushless DC-Servomotor, 24 V; 6.4 W
Controller	integrated motion controller
Electrical connection	8-pole connector
Interface	RS-232, input 0-10 V, 1 digital 24 V; output 1 digital programmable
Dimensions (L x W x H)	approx. 85 x 35 x 35 mm (3.35 x 1.38 x 1.38 in)
Weight	approx. 130 g
Remarks	Customized solution on request * depending on media and viscosity ** depending on speed, media and pressure


### Notice

Even if single parameters are within the indicated performance range of technical data, certain parameter combinations may not be achievable. Single parameters may exceed their indicated performance range under adequate circumstances. For detailed evaluation please contact HNP Mikrosysteme. Actual performance may vary. Specifications are subject to change without notice. This document is subject to change without notice.


## Accessories

- mzr-Touch Control
- Terminal box S-G05


## Dimensions

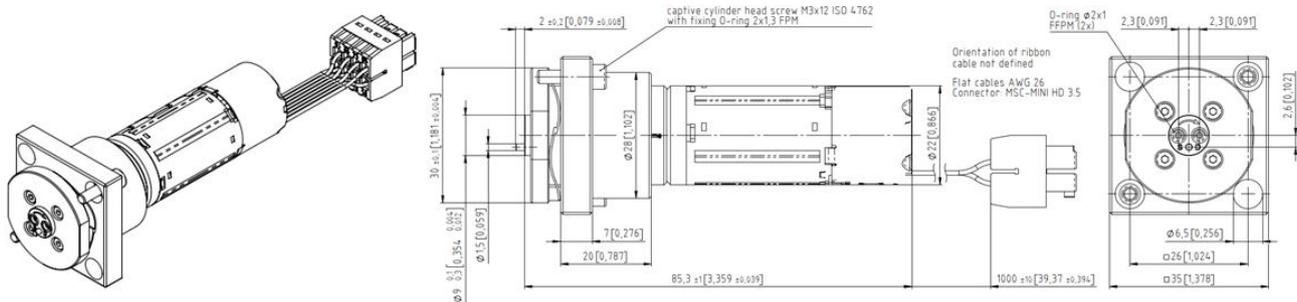

Liquid water

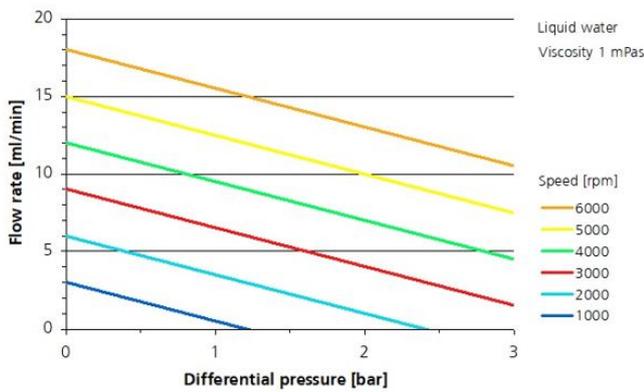

Liquid oil

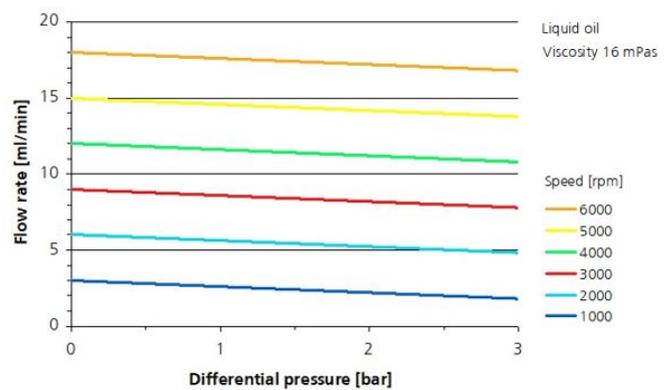

## Patents and trademarks

Micro annular gear pumps (and housings) are protected by assigned patents: EP 1 354 135 B1; US 7,698,818 B2; DE 10 2011 001 041 B4; CN 103 348 141 B; US 10,012,220 B2; CN 103 732 921 B; US 9,404,492 B2; US 6,520,757 B1.

HNP<sup>®</sup>, mzi<sup>®</sup>, MoDoS<sup>®</sup>, µ-Clamp<sup>®</sup>, µDispense<sup>®</sup>, Centrifluidic Technologies<sup>®</sup>, LiquiDoS<sup>®</sup>, smartDoS<sup>®</sup>, colorDoS<sup>®</sup> are registered German trademarks of HNP Mikrosysteme GmbH.

## Contact

HNP Mikrosysteme GmbH  
 Bleicherufer 25  
 19053 Schwerin  
 Germany

T +49 385 52190-300  
 F +49 385 52190-333  
 sales@hnp-mikrosysteme.de

Last update 2024/01