

Product information

mzr-6359 Ex · Ex-versions



Description

The micro annular gear pump mzr-6359 Ex of the hermetic inert pump series in its explosion proof version is used for highly precise, low pulsation small volume dosage even of aggressive and corrosive liquids. The compact design combined with high achievable pressures are unique features. The pump is applied in the field of chemical and process technology. Thanks to the use of rotors and functional elements being made of ceramics, a magnetic coupling, and case components made out of alloy C22, this pump will take up any challenge in the chemical industry applications.

Advantages

- Ex-certification ATEX conform with EU Directive 2014/34/EU
- Compact, chemically inert length 280 mm, alloy C22, SSiC, Al₂O₃ and ZrO₂ ceramics
- Long service life wear-resistant ceramic components
- Hermetically sealed magnetic coupling (NdFeB)
- High dosage precision precision CV < 1 % at low volumes
- Low pulsation delivery, low shear stress rotary micro annular gear technology, no valves

Technical data

Flow rate	0.024 - 112 ml/min
Smallest dosage volume	15 µl
Displacement volume	24 µl
Maximum system pressure	80 bar (1160 psi) (inlet pressure + differential pressure)
Differential pressure range	0 – 40 bar (580 psi)
Viscosity range	0.3 - 100 mPas
Precision CV	< 1 % (Coefficient of variation CV)
Ambient temperature range	0 ... +40 (+104 °F) °C
Liquid temperature range	-5 ... +60 °C (+23 ... +140 °F), -20 ... +120 °C * (-4 ... +248 °F) *
Fluid connection	1/8" NPT internal thread, lateral
Wetted parts	Pump case alloy C22 (DIN 2.4602), optional: stainless steel 316L; seals FPM (Kalrez® Spectrum™ 6375), optional: FPM, EPDM; shaft/bearing sintered silicon carbide (SSiC); bearing and wetted functional parts Al ₂ O ₃ ceramics; rotors partially stabilized ZrO ₂ , optional: tungsten carbide Ni-based
Ex-certification	CE Ex II 2G IIC c T4 X
Place of installation	Ex-area zone 1, 2
Motor	DC-motor, 24 V DC, 2 A, 53 W, encoder: 500 counts per turn, type HEDL 5540
Velocity range	1 - 4,700 rpm
Cable length	10 m
Weight	approx. 4,900 g
Remarks	* with optional heat insulation module, Customized solutions on request.


Notice

Even if single parameters are within the indicated performance range of technical data, certain parameter combinations may not be achievable. Single parameters may exceed their indicated performance range under adequate circumstances. For detailed evaluation please contact HNP Mikrosysteme. Actual performance may vary. Specifications are subject to change without notice. This document is subject to change without notice.

Accessories


- S-HD-KL
- Heat insulation module
- mzr-Touch Control

Dimensions

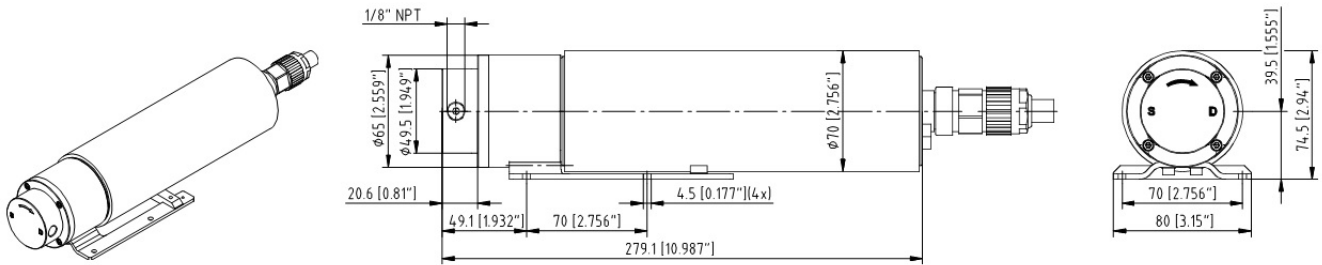

Flow charts

mzr-6359 Ex

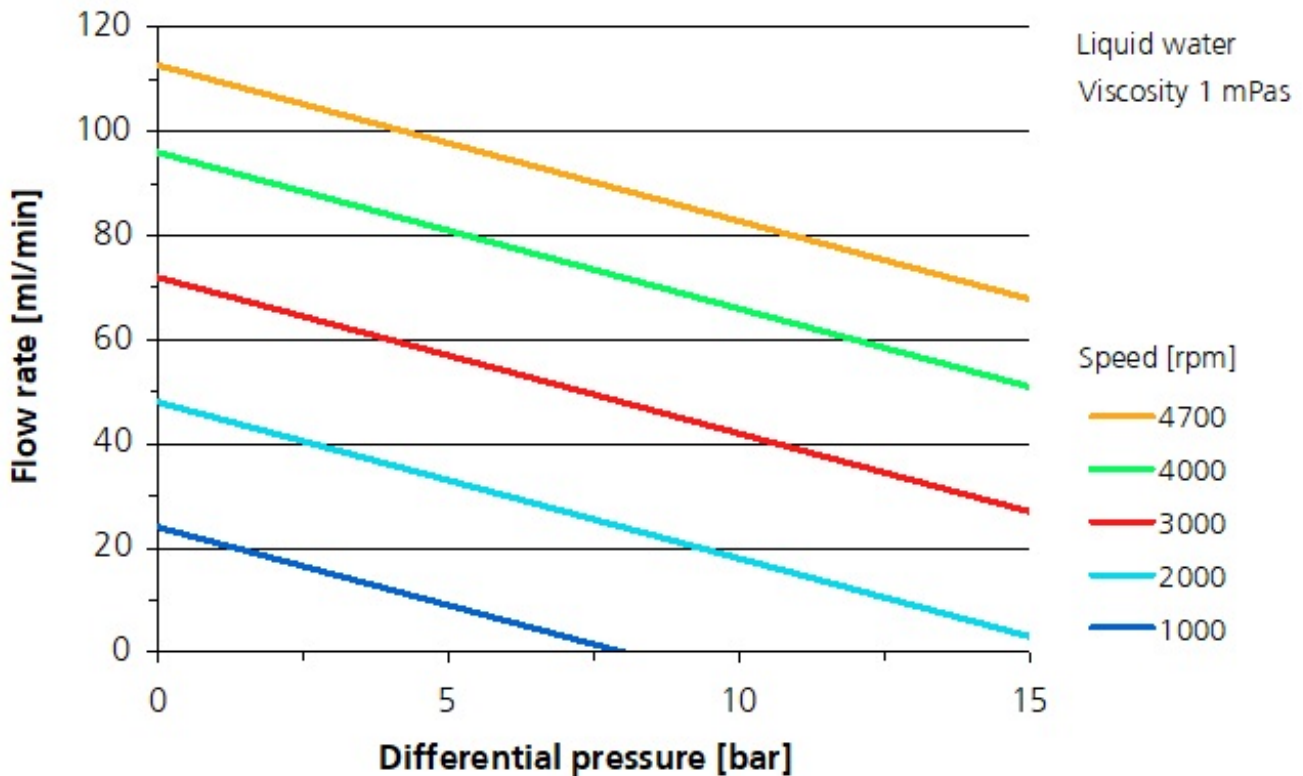

Patents and trademarks

Micro annular gear pumps (and housings) are protected by assigned patents: EP 1 354 135 B1; US 7,698,818 B2; DE 10 2011 001 041 B4; CN 103 348 141 B; US 10,012,220 B2; CN 103 732 921 B; US 9,404,492 B2; US 6,520,757 B1.

HNP[®], mzi[®], MoDoS[®], μ -Clamp[®], μ Dispense[®], Centifluidic Technologies[®], LiquiDoS[®], smartDoS[®], colorDoS[®] are registered German trademarks of HNP Mikrosysteme GmbH.

Contact

HNP Mikrosysteme GmbH
Bleicherufer 25
19053 Schwerin
Germany

T +49 385 52190-300
F +49 385 52190-333
sales@hnp-mikrosysteme.de

Last update 2023/06