


Product information

mzr-7208 · High performance pump series

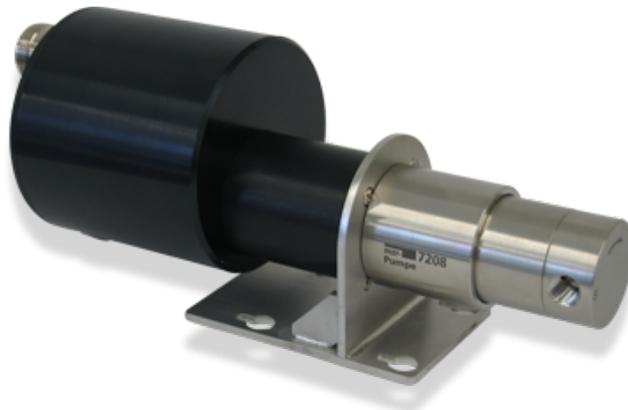

Description

The micro annular gear pump mzr-7208 covers the flow rate range 0.048-288 ml/min. To the main assets of the device belong high precision, low pulsation, low volume dosage even of non-lubricating liquids or at high pressures. Driven by a high-power DC-servomotor the pump allows dosage in a broad viscosity range and shows small, economic dimensions. The mzr-7208 targets applications in industrial production and process technology. The pump has been designed for continuous delivery and discrete dosage of water, watery solutions, solvents, methanol, oil, lubricants, adhesives, inks and paints as well as other high viscosity liquids.

Advantages

- High dosage precision precision CV < 1% at low volumes
- High differential pressures achievable even for low viscosity liquids
- Long service life wear-resistant tungsten carbide
- Broad viscosity range methanol, water, solvents, adhesives, grease, gel
- Compact dimensions length 211 mm
- Dynamic precision motor brushless DC-motor with encoder
- Low pulsation delivery, low shear stress rotary micro annular gear technology

Applications

- Chemical processing
- Industrial and plant engineering
- Packaging
- Medical and pharmaceutical industry
- Mini plant technology
- Spraying
- Dispensing of adhesives
- Ink and paint dosage
- Vacuum applications

Technical data

| | |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Flow rate | 0.048 - 288 ml/min |
| Smallest dosage volume | 30 µl |
| Displacement volume | 48 µl |
| Differential pressure range | 0 – 150 bar (2,175 psi) |
| Maximum inlet pressure | 5 bar (73 psi) |
| Liquid temperature range | -5 ... +60 °C (-20 ... +150 °C *) +23 ... +140 °F (-4 ... +302 °F *) |
| Viscosity range | 0.3 – 1,000,000 mPas |
| Precision CV | < 1% (Coefficient of variation CV) |
| Velocity range | 1 - 6,000 rpm |
| Fluid connection | 1/8" NPT internal thread, lateral optional: 1/8" NPT internal thread, frontal |
| Wetted parts | stainless steel 316L (1.4404, 1.4435), tungsten carbide Ni-based; shaft seal: graphite-reinforced PTFE, stainless steel 316L; static seals: FPM, optional: EPDM, FFPM |
| Motor | brushless DC-servomotor, IP 54, winding 36 V DC, output power 201 W, max. continuous torque 192 mNm |
| Encoder | 500 counts per turn, type HEDL 5640 |
| Dimensions (L x W x H) | 211 x 84 x 93 mm |
| Weight | approx. 2100 g |
| Remarks | * depending on accessories, Customized solutions on request. |


Notice

Even if single parameters are within the indicated performance range of technical data, certain parameter combinations may not be achievable. Single parameters may exceed their indicated performance range under adequate circumstances. For detailed evaluation please contact HNP Mikrosysteme. Actual performance may vary. Specifications are subject to change without notice. This document is subject to change without notice.


Accessories

- Heat insulation module
- Electrical heating module
- Flange connection HYG
- S-HP-E
- Reservoir Plastic
- Double shell heating module
- S-F10
- S-HV12


Dimensions

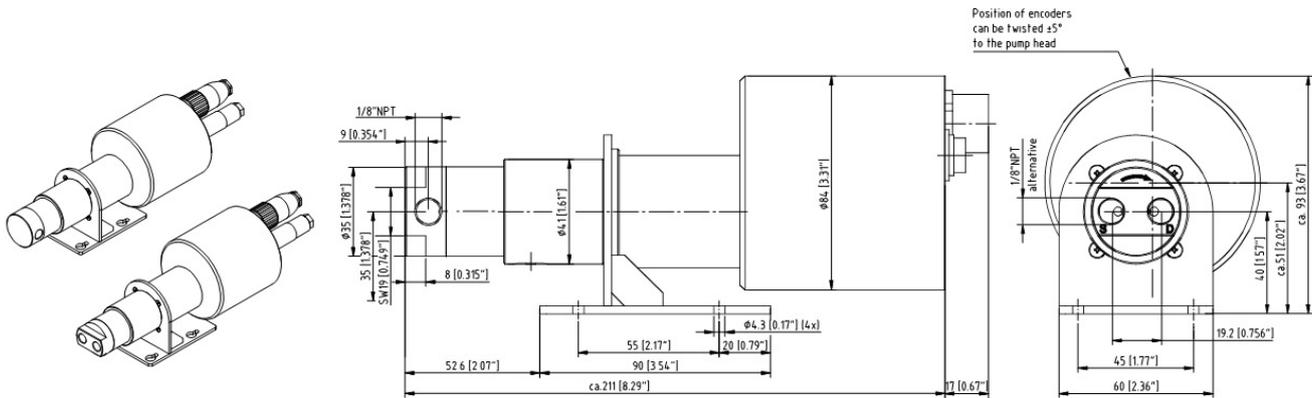

Liquid water

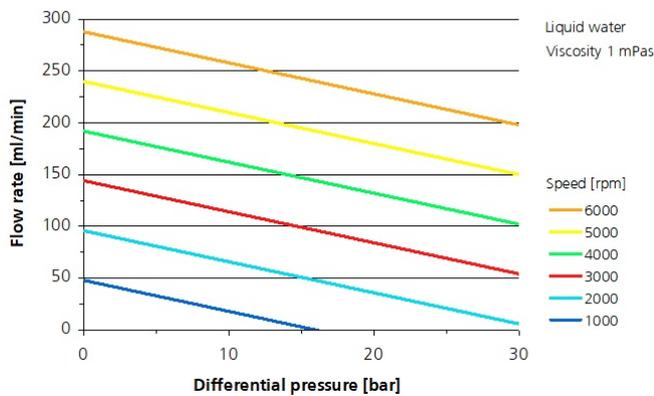

Liquid oil

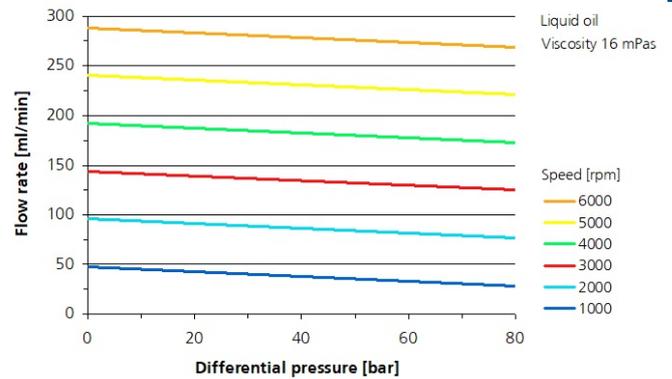

Patents and trademarks

Micro annular gear pumps (and housings) are protected by assigned patents: EP 1 354 135 B1; US 7,698,818 B2; DE 10 2011 001 041 B4; CN 103 348 141 B; US 10,012,220 B2; CN 103 732 921 B; US 9,404,492 B2; US 6,520,757 B1.

HNP M®, mzi®, MoDoS®, µ-Clamp®, µDispense®, Centifluidic Technologies®, LiquiDoS®, smartDoS®, colorDoS® are registered German trademarks of HNP Mikrosysteme GmbH.

Contact

HNP Mikrosysteme GmbH
Bleicherufer 25
19053 Schwerin
Germany

T +49 385 52190-300
F +49 385 52190-333
sales@hnp-mikrosysteme.de

Last update 2023/07