

Product information

Filter-pump functional module F-P · Functional modules



Description

The filter-pump functional module F-P allows the combination of micro annular gear pump and filter with short direct connections. The void volume of this compact system is low and the expenses of connecting elements are obsolete. The integrated wire mesh filter with a mesh size of 10 µm preventatively protects the pump and downstream fluidic micro structures from contamination with particles. Replacement of the easy accessible filter is uncomplicated, removing of the pump is unnecessary. The functional module can be used flexibly for several sizes of pumps of the low pressure and magnetic hermetic pump series. The modules can ideally be used for precise and reliable discrete and continuous dosing of volume flows from 0.15 to 72 ml/min. Applications in the field of analytical instrumentation, medical engineering and micro reaction technology as well as other.

Advantages

- Low void volume integration of micro annular gear pump and filter, short internal fluid connections
- Compact dimensions, low weight 40 x 22 x 35.5 mm, approx. 211 g (resp. without pump)
- Flexible use for mzs-pumps of low pressure and magnetic hermetic pump series low pressure pump series: mzs-2521, mzs-2921, mzs-4622, magnetic hermetic pump series: mzs-296x, mzs-466x, all pumps with manifold assembly M2.1
- Wide range of volume flows 0.15 - 9 ml/min; 0.3 - 18 ml/min and 1.2 - 72 ml/min
- Safety of operation through wire mesh filter protection of pump and downstream fluidic structures from particles
- Easy replacement of pump and filter mounting of functional module via stainless steel sheet

Applications

- Analytical instrumentation
- Laboratory automation
- Diagnostics
- Biotechnology
- Micro reaction technology
- Research and Development


Technical data

| | |
|-----------------------------|---|
| Flow rate | pump specific 0.15 - 72 * ml/min |
| Differential pressure range | pump specific 0 – 1.5 bar; 0 – 3 bar; 0 – 5 bar * |
| Maximum inlet pressure | 1 bar |
| Liquid temperature range | -20 ... +60 °C |
| Viscosity range | 0.3 - 100 mPas |
| Internal volume | 400 µl |
| Fluid connection | 1/4"-28 UNF |
| Mounting parts | 2x Ø3.4 mm, 2x M2.5x7 |
| Filter | mesh wire filter with mesh size 10 µm, filterarea 1.3 cm ² |
| Wetted parts | Filter: stainless steel 316L, static seals: FPM, optional: FFPM; EPDM, manifold adapter: stainless steel 316L |
| Dimensions (L x W x H) | 40 x 22 x 35.5 mm (without pump) |
| Weight | approx. 211 g (without pump) |
| Remarks | * pump specific value |

Notice

Even if single parameters are within the indicated performance range of technical data, certain parameter combinations may not be achievable. Single parameters may exceed their indicated performance range under adequate circumstances. For detailed evaluation please contact HNP Mikrosysteme. Actual performance may vary. Specifications are subject to change without notice. This document is subject to change without notice.

Dimensions

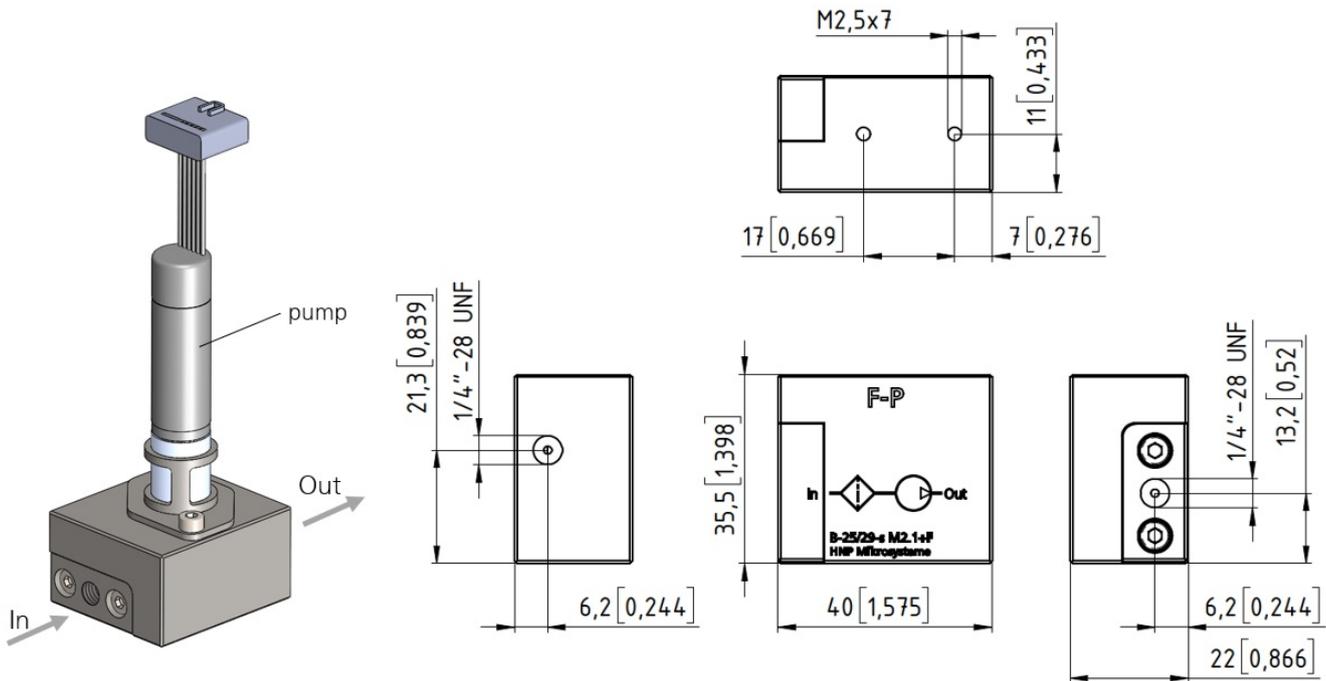

Patents and trademarks

Micro annular gear pumps (and housings) are protected by assigned patents: EP 1 354 135 B1; US 7,698,818 B2; DE 10 2011 001 041 B4; CN 103 348 141 B; US 10,012,220 B2; CN 103 732 921 B; US 9,404,492 B2; US 6,520,757 B1.

HNP[®], mzi[®], MoDoS[®], μ -Clamp[®], μ Dispense[®], Centifluidic Technologies[®], LiquiDoS[®], smartDoS[®], colorDoS[®] are registered German trademarks of HNP Mikrosysteme GmbH.

Contact

HNP Mikrosysteme GmbH
 Bleicherufer 25
 19053 Schwerin
 Germany

T +49 385 52190-300
 F +49 385 52190-333
 sales@hnp-mikrosysteme.de

Last update 2023/06